



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

26. 11. 2004

REC'D 17 DEC 2004

WIPO PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03104440.7

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:  
Application no.: 03104440.7  
Demande no:

Anmeldetag:  
Date of filing: 28.11.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

ARES TRADING S.A.  
Le Château  
CH-2038 Vaumarcus  
SUISSE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

PROCESS FOR RECYCLING SOLID SUPPORTS FOR CULTIVATION OF ANCHORAGE-DEPENDENT CELLS

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G12M/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

## PROCESS FOR RECYCLING SOLID SUPPORTS FOR CULTIVATION OF ANCHORAGE-DEPENDENT CELLS

### FIELD OF THE INVENTION

5        This invention relates to methods for use in industrial production of proteins. Specifically, the present invention provides a method of recycling solid supports for cultivation of anchorage-dependent cells such as, e.g., microcarriers and Fibra-Cel® disks. Solid supports recycled by a method of the present invention allow obtaining a protein productivity level comparable to the productivity level obtained with non-recycled solid supports.

10

### BACKGROUND OF THE INVENTION

      The increasing demand for therapeutic proteins produced in mammalian expression systems has led in the past 30 years to significant advances in the areas of *in vitro* cell cultivation, scale-up, expression vectors and medium development.

15        While ordinary suspension cultures are suitable for growth of certain mammalian cell lines, many cells are anchorage-dependent, and require a solid surface in order to proliferate, metabolize nutrients and produce biomolecules. Conventional means for growth of these cells on a small scale include petri-dishes, flasks and roller bottles. A number of approaches have been taken by various investigators to develop packed bed bioreactors with large surface-  
20        area-to-volume ratios for space and operational economy. Another approach is to culture cells on a packing material inside a column shaped vessel that is linked to a bioreactor (Wang *et al.* 1992).

      The use of solid supports such as microcarriers or Fibra-Cel® disks in bioreactor systems increases the available growth area for anchorage-dependent cells per unit of volume  
25        and results in obtaining satisfactory protein productivity. Microcarriers and Fibra-Cel® disks are thus routinely used in animal cell culture for the growth of anchorage-dependent cells and are among the established technological platforms for industrial production of proteins (see, e.g., Buck and Loh 1985; Bohak *et al.* 1987; Petti *et al.* 1994; Ikonomou *et al.* 2002).

      Microcarriers are small solid particles on which cells may be grown in suspension  
30        culture. Cells are capable of adhering and propagating on the surface of microcarriers. Typically, microcarriers consist of beads, the diameter of which is comprised between 90 µm and 300 µm. Microcarriers can be made of various materials that have proven successful for cell attachment and propagation such as, e.g., glass, polystyrene, polyethylene, dextran, gelatin and cellulose. In addition, the surface of microcarriers may be coated with a material  
35        promoting cell attachment and growth such as, e.g., e.g., N,N-diethylaminoethyl, glass, collagen or recombinant proteins. Both macroporous and non-porous microcarriers do exist.

Macroporous surfaces give the cells easy access to the interior of the microcarrier after inoculation, and once inside of the microcarrier, the cells are protected from the shear forces generated by mechanical agitation and aeration in the bioreactor.

5 Fibra-Cel® disks are disks of 6 mm in diameter that are composed of polyester non-woven fiber bonded to a sheet of polypropylene mesh (see, e.g., U.S. patent No. 5,266,476 and world wide web pages [nbsc.com/products/miscellaneous/fibracel/](http://nbsc.com/products/miscellaneous/fibracel/) and [nbsc.com/support/faqs/#fibra](http://nbsc.com/support/faqs/#fibra)). Fibra-Cel® disks are usually treated electrostatically to facilitate suspension cells adhering to the disks and becoming trapped in the fiber system, where they remain throughout the cultivation process. Cell density and productivity achieved with cells  
10 grown on Fibra-Cel® disks can be up to ten times higher than with cells growing on microcarriers.

Currently, Fibra-Cel® disks and microcarriers are not re-used (see, e.g. Buck and Loh. 1985). However, using new solid supports for each protein production phase is expensive. In addition, changing the solid support after each protein production phase is time-consuming.  
15 Accordingly, there is a need for a method of recycling solid supports for cultivation of anchorage-dependent cells *in situ*, said method allowing maintaining a protein productivity level comparable to the protein productivity level obtained with non-recycled supports.

### SUMMARY OF THE INVENTION

20 The present invention provides methods of recycling solid supports for cultivation of anchorage-dependent cells *in situ*. The methods of the present invention allow maintaining a protein productivity level comparable to the protein productivity level obtained with non-recycled supports. The methods of the present invention improve the protein production process both in terms of cost and in terms of overall efficiency.

25 Accordingly, a first aspect of the present invention is directed to a method of recycling a solid support for cultivation of anchorage-dependent cells located within a system for cell cultivation comprising the steps of:

- a) emptying said system of liquid;
- b) rinsing said system with an aqueous solution;
- 30 c) rinsing said system with a sodium hydroxide solution; and
- d) rinsing said system with an aqueous solution.

A second aspect of the present invention relates to a solid support for cultivation of anchorage-dependent cells recycled according to a method of the present invention.

A third aspect relates to the use of such a solid support recycled according to a method  
35 of the present invention for cultivation of cells.

### **BRIEF DESCRIPTION OF THE FIGURES**

Figure 1 compares the protein productivity measured when cultivating cells using non-recycled Fibra-Cel® disks (gray dots) or using Fibra-Cel® disks recycled according to a method of the present invention (black triangles).

5        Figure 2 compares the glucose consumption rate obtained when cultivating cells using non-recycled Fibra-Cel® disks (gray squares) or using Fibra-Cel® disks recycled according to a method of the present invention (black triangles).

### **DETAILED DESCRIPTION OF THE INVENTION**

10        The present invention stems from the finding of a method of recycling solid supports for cultivation of anchorage-dependent cells *in situ*. As shown in Example 3, said method allows maintaining a protein productivity level with recycled supports comparable to the protein productivity level obtained with non-recycled supports.

15        A first aspect of the present invention is directed to a method of recycling a solid support for cultivation of anchorage-dependent cells located within a system for cell cultivation comprising the steps of:

- a) emptying said system of liquid;
- b) rinsing said system with an aqueous solution;
- c) rinsing said system with a sodium hydroxide solution; and
- 20        d) rinsing said system with an aqueous solution.

As used herein, the terms "re-use" and "recycle" are considered to be synonymous and can be used interchangeably throughout the disclosure.

As used herein, the term "rinse" refers to a method comprising the steps of:

- (i) filling a device with a liquid;
- 25        (ii) incubating said liquid in said device; and
- (iii) emptying said device of said liquid.

Preferably, the liquid is circulating in the device during step (ii).

A preferred embodiment is directed to such a method of recycling a solid support for cultivation of anchorage-dependent cells wherein said aqueous solution is water.

30        Another preferred embodiment is directed to such a method of recycling a solid support for cultivation of anchorage-dependent cells wherein the sodium hydroxide solution is at a concentration within a range of about 1% to about 3% sodium hydroxide. Preferably, said concentration is within a range of about 1.5 % to about 2.5 % sodium hydroxide. Most preferably, said concentration is about 2 % sodium hydroxide.

In still another preferred embodiment, the present invention is directed to a method of recycling a solid support for cultivation of anchorage-dependent cells wherein step (c) is carried out by filling the system with a sodium hydroxide solution at a desired concentration of sodium hydroxide. In another preferred embodiment, step (c) is carried out by filling the system with water and by adding a concentrated sodium hydroxide solution to reach a desired concentration of sodium hydroxide within the system. The desired concentration of sodium hydroxide is preferably within a range of about 1% to about 3% sodium hydroxide. More preferably, desired concentration of sodium hydroxide is within a range of about 1.5 % to about 2.5 % sodium hydroxide. Most preferably, said desired concentration of sodium hydroxide is about 2 % sodium hydroxide.

As used throughout the specification, the term "solid support for cultivation of anchorage-dependent cells" refers to a material for the growth of cells that require attachment to a solid surface in order to efficiently proliferate, metabolize nutrients, and/or produce proteins.

In one embodiment of the present invention, the solid support for cultivation of anchorage-dependent cells is made, e.g., of non-woven fibrous matrix bonded to a porous support sheet. Such supports can be made according to US patent No. 5,266,476. Preferably, such supports comprise a matrix that is a physiologically acceptable three-dimensional network of fibers in the form of a sheet having a pore volume as a percentage of total volume of from 40 to 95% and a pore size of from 10 microns to 100 microns, the overall height of the matrix being from 50 microns to 500 microns. The matrix may for example be made of fibers selected from the group consisting of flat, non-round, and hollow fibers and mixtures thereof, said fibers being of from 0.5 microns to 50 microns in diameter or width. Alternatively, the material of the matrix may be selected from the group consisting of polyesters, polyalkylenes, polyfluorochloroethylenes, polyvinyl chloride, polystyrene, polysulfones, cellulose acetate, glass fibers, and inert metal fibers. The support may be, e.g., in a shape selected from the group consisting of squares, rings, discs, and cruciforms. More preferably, the matrix is comprised of non-woven polyester and the support is comprised of a sheet of polypropylene mesh with substantially square mesh opening of about one square millimeter. In a most preferred embodiment, the solid support is a disk made of non-woven polyester bonded to a sheet of polypropylene mesh. Such supports are commercialized under the name of Fibracel® disks (New Brunswick Scientific).

In another embodiment of the present invention, the solid support for cultivation of anchorage-dependent cells is a microcarrier. Numerous microcarriers are well-known in the art and commercially available. The microcarrier may for example be made of a material selected from the group consisting polystyrene (e.g., Biosilon®, Nunc; 2D MicroHex®, Nunc;

SoloHill's microcarriers), polyethylene weighted with silica (e.g., Cytoline<sup>®</sup>, Amersham), glass (e.g., G-2892, Sigma), gelatin (e.g., Cultispher<sup>®</sup>, Hyclone), cellulose (e.g., Cytopre<sup>®</sup>, Amersham) and dextran (e.g., Cytodex<sup>®</sup>, Amersham). In addition, the microcarrier may be coated. The microcarrier may for example be coated with a material selected from the group consisting of glass (e.g., SoloHill's glass-coated microcarriers), N,N-diethylaminoethyl (e.g., Cytodex<sup>®</sup>1, Amersham), collagen (e.g., Cytodex<sup>®</sup>3, Amersham) and recombinant proteins (e.g., ProNectin<sup>®</sup>, SoloHill). In one preferred embodiment, the microcarrier is a macroporous microcarrier such as, e.g., Cytopore<sup>®</sup> or Cultispher<sup>®</sup>. In another preferred embodiment, the microcarrier is a non-porous support such as, e.g., glass beads, Cytodex<sup>®</sup>, Biosilon<sup>®</sup> or 2D MicroHex<sup>®</sup>.

As used throughout the specification, the term "a system for cell cultivation" refers to a device or several connected devices in which cells are cultivated.

In one embodiment, such a system comprises a bioreactor. The term "bioreactor" refers to an apparatus or closed container that is used for generating biomolecules such as secreted proteins using the synthetic or chemical conversion capacity of a cell. Bioreactors include classical fermentors and cell culture perfusion systems. Bioreactors allow controlling various parameters during the cell culture process such as, e.g., the circulation loop flow, the temperature, the overpressure and/or the medium perfusion rate.

In one preferred embodiment, the system for cell cultivation is designed for comprising a packed bed of microcarriers or of Fibra-Cel<sup>®</sup> disks within the bioreactor. Typically, such bioreactors comprise an internal column in which the solid support for cultivation of anchorage-dependent cells is located.

In one preferred embodiment, the system for cell cultivation further comprises an external column connected to the bioreactor. In this embodiment, the bioreactor is used as a media-conditioning tank, with the cells grown and propagated in the external column. Such systems comprising external columns may be designed, e.g., according to Example 1.1. and/or as described in Wang *et al.* (1992). The connection between the external column and the bioreactor preferably comprises a circulation pump.

The solid support for cultivation of anchorage-dependent cells may be located either within the bioreactor or within the external column. When using a system for cell cultivation comprising an external column, the solid support is preferably located within the external column. When using a system for cell cultivation without external column, the system preferably comprises a bioreactor comprising an internal column in which the solid support is located.

In a most preferred embodiment of the present invention, the system for cell cultivation comprises an external column connected to a bioreactor, wherein the solid support for cultivation of anchorage-dependent cells is located within the external column, and wherein the connection between the external column and the bioreactor comprises a circulation pump.

5 In another most preferred embodiment, the system for cell cultivation comprises a bioreactor comprising an internal column, wherein the solid support for cultivation of anchorage-dependent cells is located within said internal column. Such systems are particularly advantageous in the frame of the present invention since using such systems allows efficient circulation of rinsing solutions through the packed bed external column.

10 In one embodiment, the system for cell cultivation is sterilized after performing step (d).

When using a system for cell cultivation comprising an external column, the external column may be removed from the system after performing step (d). Accordingly, in another embodiment the external column is sterilized after performing step (d).

15 A preferred embodiment of the present invention is directed to a method of recycling a solid support for cultivation of anchorage-dependent cells wherein step (d) is performed at least twice. Preferably, step (d) is performed at least three times. Most preferably, step (d) is performed three times.

In a preferred embodiment, step (d) is carried out with a circulation loop flow within a range of about  $500 \text{ l.h}^{-1}.\text{kg}^{-1}$  to about  $700 \text{ l.h}^{-1}.\text{kg}^{-1}$ . Preferably, said circulation loop flow is  
20 within a range of about  $550 \text{ l.h}^{-1}.\text{kg}^{-1}$  to about  $650 \text{ l.h}^{-1}.\text{kg}^{-1}$ . Most preferably, said circulation loop flow is of about  $583 \text{ l.h}^{-1}.\text{kg}^{-1}$ .

In a further preferred embodiment, step (d) is carried out at ambient temperature. Typically, the ambient temperature is within a range of about  $15^{\circ}\text{C}$  to about  $30^{\circ}\text{C}$ .

25 In a further preferred embodiment, step (d) is carried out under an overpressure with in a range of about 100 millibars to about 300 millibars. Preferably, said overpressure is within a range of about 150 millibars to about 250 millibars. Most preferably, said overpressure is of about 200 millibars.

In a further preferred embodiment, step (d) is carried out for a duration within a range of about 5 minutes to about 30 minutes. Preferably, said duration is within a range of about 5  
30 minutes to about 20 minutes. Most preferably, said duration is of about 10 minutes.

In another preferred embodiment, step (c) is carried out with a circulation loop flow set at an initial value within a range of about  $100 \text{ l.h}^{-1}.\text{kg}^{-1}$  to about  $300 \text{ l.h}^{-1}.\text{kg}^{-1}$ , and the circulation loop flow is progressively increased to a final value within a range of about  $500 \text{ l.h}^{-1}.\text{kg}^{-1}$  to about  $700 \text{ l.h}^{-1}.\text{kg}^{-1}$ . Preferably, the initial value is within a range of about  $150 \text{ l.h}^{-1}.\text{kg}^{-1}$   
35 to about  $250 \text{ l.h}^{-1}.\text{kg}^{-1}$ . Most preferably, the initial value is of about  $215 \text{ l.h}^{-1}.\text{kg}^{-1}$ . Preferably, the



final value is within a range of about  $550 \text{ l.h}^{-1}.\text{kg}^{-1}$  to about  $650 \text{ l.h}^{-1}.\text{kg}^{-1}$ . Most preferably, the final value is of about  $583 \text{ l.h}^{-1}.\text{kg}^{-1}$ . Preferably, the circulation loop flow is maintained at a final value of about  $583 \text{ l.h}^{-1}.\text{kg}^{-1}$  for a duration within a range of about 20 minutes to about 40 minutes. More preferably, said duration is within a range of about 25 minutes to about 35 minutes. Most preferably, said duration is of about 30 minutes.

In still another preferred embodiment, wherein step (c) is carried out at a temperature within a range of about  $50^{\circ}\text{C}$  to about  $70^{\circ}\text{C}$ . Preferably, said temperature is within a range of about  $55^{\circ}\text{C}$  minutes to about  $65^{\circ}\text{C}$  minutes. Most preferably, said temperature is of about  $60^{\circ}\text{C}$ .

10 A preferred embodiment of the present invention is directed to a method of recycling a solid support for cultivation of anchorage-dependent cells wherein step (b) is carried out at a temperature within a range of about  $50^{\circ}\text{C}$  to about  $70^{\circ}\text{C}$ . Preferably, said temperature is within a range of about  $55^{\circ}\text{C}$  to about  $65^{\circ}\text{C}$ . Most preferably, said temperature is of about  $60^{\circ}\text{C}$ .

15 In yet a further preferred embodiment, step (b) is carried out under an overpressure within a range of about 200 millibars to about 400 millibars. Preferably, said overpressure is within a range of about 250 millibars to about 350 millibars. Most preferably, said overpressure is of about 300 millibars.

20 In another preferred embodiment, step (b) is carried out for a duration within a range of about 5 minutes to about 30 minutes. Preferably, said duration is within a range of about 5 minutes to about 20 minutes. Most preferably, said duration is of about 10 minutes.

Many variations and/or adaptations may be applied by the man of skill in the art to the temperature, the overpressure, the circulation loop flow and the duration for/at which steps (b) to (d) are carried out. For example, flow rates may vary depending on (i) the type of solid support for cultivation of anchorage-dependent cells; and (ii) the porosity of the solid support. Further, carrying out step (b) and (d) under overpressure is not an absolute requirement. However, it is good practice to minimize risk of contamination.

Alternatively, solid supports for cultivation of anchorage-dependent cells may be recycled *ex situ* in a method comprising the steps of:

- a) removing the solid support from a system for cell cultivation;
- 30 b) rinsing said solid support with an aqueous solution;
- c) rinsing said solid support with a sodium hydroxide solution; and
- d) rinsing said solid support with an aqueous solution.

35 A second aspect of the present invention is directed to a solid support for cultivation of anchorage-dependent cells recycled according to a method of the present invention.

A third aspect of the present invention is directed to the use of a solid support recycled according to a method of the present invention for cultivation of cells.

The cells may be of, e.g., animal, insect or microbial origin. As used herein, the term "animal cell" includes human and non-human mammalian cells, non-mammalian cells, 5 recombinant cells and hybridomas. Examples of mammalian cells that can be cultivated using a solid support according to the present invention include, e.g., 3T3 cells, COS cells, human osteosarcoma cells, MRC-5 cells, BHK cells, VERO cells, CHO cells, rCHO-tPA cells, rCHO – Hep B Surface Antigen cells, HEK 293 cells, rHEK 293 cells, rC127 – Hep B Surface Antigen 10 cells, Normal Human fibroblast cells, Stroma cells, Hepatocytes cells, PER.C6 cells and human permanent amniocytic cells. Examples of hybridomas that can be cultivated using a solid support according to the present invention include, e.g., DA4.4 cells, 123A cells, 127A cells, GAMMA cells and 67-9-B cells. Examples of insect cells that can be cultivated using a solid support according to the present invention include, e.g., lepidopteran cells, Tn-368 cells, SF9 cells, rSF9 cells and Hi-5 cells (see, e.g., Ikonomou *et al.* 2002). Examples of non- 15 mammalian cells that can be cultivated using a solid support according to the present invention include, e.g., brown bullhead cell lines (see, e.g., Buck *et al.* 1985). Examples of microorganisms that can be cultivated using a solid support according to the present invention include, e.g., *Coniothyrium minitans*, *Kluyveromyces lactis*, *Phanerochaete chrysosporium*, *Scedosporium apiospermum*, *Cephalosporium acremonium* and *Beauveria bassiana* (see, 20 e.g., Sabu *et al.* 2002)

In a preferred embodiment, the cell is a mammalian cell. Cultivation of mammalian cells is an established process for production of therapeutic proteins. Therapeutic proteins that may be produced using a solid support recycled according to a method of the present invention include, e.g., chorionic gonadotropin, follicle-stimulating hormone, lutropin- 25 choriogonadotropic hormone, thyroid stimulating hormone, human growth hormone, interferons (e.g., interferon beta-1a, interferon beta-1b), interferon receptors (e.g., interferon gamma receptor), TNF receptors p55 and p75, TACI-Fc fusion proteins, interleukins (e.g., interleukin-2, interleukin-11), interleukin binding proteins (e.g., interleukin-18 binding protein), anti-CD11a antibodies, erythropoietin, granulocyte colony stimulating factor, granulocyte- 30 macrophage colony-stimulating factor, pituitary peptide hormones, menopausal gonadotropin, insulin-like growth factors (e.g., somatomedin-C), keratinocyte growth factor, glial cell line-derived neurotrophic factor, thrombomodulin, basic fibroblast growth factor, insulin, Factor VIII, somatropin, bone morphogenetic protein-2, platelet-derived growth factor, hirudin, epoietin, recombinant LFA-3/IgG1 fusion protein, glucocerebrosidase, and muteins, fragments, soluble 35 forms, functional derivatives, fusion proteins thereof.

In one embodiment, the cells are anchorage-dependent. In another embodiment, the cells are not anchorage-dependent. Actually, suspension cells can also be propagated on microcarriers and on supports made of non-woven fibrous matrix bonded to a porous support sheet such as Fibra-Cel®. The density of suspension cells propagated on such supports is even greater than the density that can be attained in suspension cultures.

Having now fully described this invention, it will be appreciated by those skilled in the art that the same can be performed within a wide range of equivalent parameters without departing from the spirit and scope of the invention and without undue experimentation.

While this invention has been described in connection with specific embodiments thereof, it will be understood that it is capable of further modifications. This application is intended to cover any variations, uses or adaptations of the invention following, in general, the principles of the invention and including such departures from the present disclosure as come within known or customary practice within the art to which the invention pertains and as may be applied to the essential features hereinbefore set forth as follows in the scope of the appended claims. For example, flow rates may vary depending on (i) the type of solid support for cultivation of anchorage-dependent cells; and (ii) the porosity of the solid support. Further, the overpressure is not an absolute requirement, but good practice to minimize risk of contamination.

All references cited herein, including journal articles or abstracts, published or unpublished patent application, issued patents or any other references, are entirely incorporated by reference herein, including all data, tables, figures and text presented in the cited references. Additionally, the entire contents of the references cited within the references cited herein are also entirely incorporated by reference.

Reference to known method steps, conventional methods steps, known methods or conventional methods is not any way an admission that any aspect, description or embodiment of the present invention is disclosed, taught or suggested in the relevant art.

The foregoing description of the specific embodiments will so fully reveal the general nature of the invention that others can, by applying knowledge within the skill of the art (including the contents of the references cited herein), readily modify and/or adapt for various application such specific embodiments, without undue experimentation, without departing from the general concept of the present invention. Therefore, such adaptations and modifications are intended to be within the meaning and range of equivalents of the disclosed embodiments, based on the teaching and guidance presented herein. It is to be understood that the phraseology or terminology herein is for the purpose of description and not of limitation, such that the terminology or phraseology of the present specification is to be interpreted by the skilled artisan in light of the teachings and guidance presented herein, in combination with the knowledge of one of ordinary skill in the art.

## EXAMPLES

### Example 1: Cell Culture Process

#### 5           1.1. Equipment

All experiments were performed with a system composed of a 15 liters bioreactor connected to a 5.5 liters external column. The configuration of the 15 liters bioreactor was similar to the configuration of 40 liters Free-Standing Laboratory bioreactors manufactured by New MBR. The working volume of the bioreactor was of 11 liters. The external column, 40 cm  
10 high and 18 cm in diameter, was made of inox 316L, with a Ra of 0.6 µm. The Ra describes the average surface roughness and is defined as an integral of the absolute value of the roughness profile measured over an evaluation length:

$$Ra = \frac{1}{l} \int_0^l |z(x)| dx$$

The external column was packed with 600 g of Fibra-Cel® disks (New Brunswick Scientific).

15

#### 1.2. Cell lines and media

##### 1.2.1. *Cell lines*

All experiments were performed with a CHO cell line producing a protein corresponding to the soluble extracellular portion of the p55 TNF receptor (SwissProt  
20 Accession No. P19438). The produced protein, designated r-hTBP-1, comprises amino acids 41 to 201 of SwissProt Accession No. P19438.

The r-hTBP-1-producing cell line was generated by transfecting CHO-DUKX cells with a vector comprising a cDNA encoding r-hTBP-1 and appropriate expression elements. Transfected clones were selected and a stably r-hTBP-1 expressing cell line was established.

#### 25           1.2.2. *Media*

The medium used for cell cultivation was the Sigma C1850 medium.

#### 1.3. Inoculation, growth and production conditions

The culture process, also referred to as "run", comprises an inoculation step, a growth  
30 phase and a production phase.

##### 1.3.1. *Inoculation conditions*

1.6.10<sup>9</sup> viable r-hTBP-1-producing cells were transferred to the bioreactor. The pump circulation being on during inoculation, the cells naturally attach to the Fibra-Cel® discs.

The Initial set-points for the conditioning tank control unit are as follows:

- Temperature: 37.0°C
- Dissolved oxygen (DO): 50% air saturation
- pH: 7.00
- 5 - agitation: 20 rpm
- Bioreactor overpressure: 0.2 bar

### 1.3.2. Growth conditions

During the growth phase, the bioreactor is operated in batch mode until the second day and then the dilution rate is progressively increased until a maximal value of 57 liters of perfused medium *per day* ( $100 \text{ L} \cdot \text{day}^{-1} \cdot \text{kg}^{-1}$  of Fibra-Cel®). The agitation is set at 60 rpm after inoculation of the bioreactor. The pump circulation flow is progressively increased from  $150 \text{ L} \cdot \text{h}^{-1}$  to  $350 \text{ L} \cdot \text{h}^{-1}$ . On the eleventh day, the dissolved oxygen (DO) set-point is increased to 70% air saturation.

### 1.3.2. Production conditions

15 Once the Glucose Consumption Rate (GCR) is superior to  $150 \text{ g} \cdot \text{day}^{-1} \cdot \text{kg}^{-1}$  of Fibra-Cel®, the perfusion level is reduced to 18 liters of perfused medium *per day* ( $30 \text{ L} \cdot \text{day}^{-1} \cdot \text{kg}^{-1}$  of Fibra-Cel®). The production phase lasts 60 days.

## Example 2: Analytical methods

20

### 2.1. Measurement of the total organic carbone (TOC)

Total organic carbon (TOC) is an indirect measure of organic molecules present in pharmaceutical water measured as carbon. TOC is commonly used as a process control attribute to monitor the performance of unit operations comprising the purification and distribution system. TOC allows determining whether all organic molecules have been removed after cleaning. A number of methods exist for analyzing TOC (see, e.g., European Pharmacopeia, 4th Edition, 2002, Chapter 2.2.44).

25 The TOC was measured using a Phoenix 8000 apparatus (Dohrmann) according to a protocol derived from the manufacturer's instructions. The TOC was expressed in parts per million (ppm).

30

### 2.2. Measurement of the Limulus amebocyte lysate (LAL)

The Limulus Amebocyte Lysate (LAL) test is a test to detect or quantify bacterial endotoxins that may be present in or on a sample to which the test is applied. It uses Limulus Amebocyte Lysate obtained from the aqueous extracts of circulating amebocytes of horseshoe crab (*Limulus polyphemus* or *Tachypleus tridentatus*) which has been prepared

35

and characterized for use as a LAL Reagent (see, e.g., Pharmacopeia of the United States of America, Twenty-Sixth Revision, Chapter 85)

The LAL was measured using a LAL Kinetic System comprising the WinkQCL<sup>®</sup> Software (Biowhittaker) according to a protocol derived from the manufacturer's instructions.

5 The LAL was expressed in Endotoxin Units *per* millilitre (EU.ml<sup>-1</sup>).

### 2.3. Measurement of the Bio Burden

The Bio Burden is a measure of the level of viable microorganisms present in or on a sample. Bio Burden is also referred to as "Total Viable Aerobic Count". Numerous methods for  
10 measuring Bio Burden are available (see, e.g., European Pharmacopea, 4th Edition, 2002 Chapter 2.6.12).

The Bio Burden was tested by membrane filtration (see the European Pharmacopea, 4th Edition, 2002 Chapter 2.6.12). The membrane filters were incubated on petri-dishes comprising the following media:

- 15 - Trypcase-soja agar;
- Trypcase-soja agar + 0.07% Lecithin + 0.5% Tween 80; or
- Trypcase-soja agar + 5% sheep blood.

The plates were incubated during 5 days at 32,5°C. The Bio Burden was expressed in number of colony-forming units *per* millilitre (CFU.ml<sup>-1</sup>).

20

### 2.4. Measurement of the cumulative productivity of r-hTBP-1

The Cumulative Productivity (CP), expressed in g of r-hTBP-1 *per* Kg of Fibra-Cel<sup>®</sup>, was calculated as follows:  $CP = (CP \text{ of the day before}) + ((r\text{-hTBP-1 Titer of the day X Perfusion} / \text{mass of Fibra-Cel}^{\circledast} \text{ in Kg}) / 1000 \times (\text{time between the day before and the current day in hour}))$ .  
25

The perfusion was expressed in liters *per* 24h. The r-hTBP-1 titer was expressed in mg *per* liter. The r-hTBP-1 titer was measured by an immunoenzymometric assay (IEMA), using the Serozyme kit from BioChem ImmunoSystems (Germany) and monoclonal anti-r-hTBP-1 antibodies.

30

### 2.5. Measurement of the glucose consumption rate (GCR)

The glucose consumption rate (GCR), expressed in grams of glucose consumed *per* day *per* kg of Fibra-Cel<sup>®</sup>, was calculated as follows:  $GCR = (((G_{in} - G_{bioreactor}) \times \text{Perfusion}) + (G_{bioreactor} \text{ of the day before} - G_{bioreactor} \text{ of the day}) \times ((\text{working volume in liters} / \text{time between the day before and the current day in hour}) / \text{mass of Fibra-Cel}))$ .  
35

$G_{in}$  corresponds to the glucose concentration of the medium perfused into the system, expressed in grams *per* litre.  $G_{bioreactor}$  corresponds to the glucose concentration of the medium

within the bioreactor. The perfusion was expressed in liters *per* 24h. The working volume corresponds to the volume in liters of the culture in the system. Mass of Fibra-Cel is expressed in Kg.

5

### **Example 3: Recycling protocol and results**

#### **3.1. Recycling**

At the end of a run carried out with non-recycled Fibra-Cel® disks, the entire system was emptied of all liquid and then refilled with hot Water For Injection (WFI). The temperature of the WFI was superior to 70°C. The circulation loop flow was set at 583 l.h<sup>-1</sup>.kg<sup>-1</sup> during 10 mn (5 mn top/down flow and 5 mn down/top flow). The overpressure was of 300 mbars. Then, WFI was drained.

The system was refilled with WFI and a concentrated sodium hydroxide solution (10%) was added to reach a final concentration in the system of 2%. Then, the rotary lobe pump flow rate was progressively increased from 215 to 583 l.h<sup>-1</sup>.kg<sup>-1</sup> and maintained at this latter circulation loop flow rate during 30 mn (15 mn top/down flow and 15 mn down/top flow) at a temperature of 60°C.

Afterwards, one to four rinses were performed with ambient WFI at 583 l.h<sup>-1</sup>.kg<sup>-1</sup> and 200 mbars of overpressure. Each rinse lasted a minimum of 10 mn (5 mn top/down flow and 5 mn down/top flow).

Samples were transferred for pH, Limulus Amebocyte Lysate (LAL), Total organic carbon (TOC) and Bio Burden analyses after each rinsing-phase. LAL, TOC and Bio Burden were tested as described above, and pH was tested with paper pH. LAL, TOC, Bio Burden and pH indicate whether the system is clean or not. Preferably, pH shall be inferior to 8, LAL inferior to 0.5 EU.ml<sup>-1</sup>, Bio Burden inferior to 5 CFU.ml<sup>-1</sup>, and TOC inferior to 10 ppm before starting a new run.

The results of LAL, TOC, Bio Burden and pH analyses performed on samples transferred after each rinsing-phase are shown in table 1:

**Table 1**

	pH	LAL	Bio Burden	TOC
1 <sup>st</sup> rinse	>10	>2.5	0.44	not measured
2 <sup>nd</sup> rinse	<10	0.0526	4	not measured
3 <sup>rd</sup> rinse	< 8	0.1837	5	not measured
4 <sup>th</sup> rinse	< 8	0.2168	3	0.4

30

The different analyses done after each rinsing-phase show that three rinses are sufficient to reach a pH value < 8, a LAL value ≤ 0.5 EU.ml<sup>-1</sup> and a Bio Burden value ≤ 5

CFU.ml<sup>-1</sup>. Accordingly, three rinsing phases allow reaching LAL, TOC, Bio Burden and pH that are conform to those required for starting a new run with the system.

5      **3.2. Cumulative productivity and glucose consumption rate during runs with non-recycled or with recycled Fibra-Cel® disks**

10      A subsequent run was performed with recycled Fibra-Cel® disks that had been rinsed three times. The day after the cleaning, the column containing recycled Fibra-Cel® disks was sterilized and kept sterile until start of the new run. The cumulative productivity and glucose consumption rate measured during this subsequent run are shown on Figures 1 and 2 respectively. The cumulative productivity and glucose consumption rate measured during runs with non-recycled Fibra-Cel® disks are also reported.

15      As shown on Figures 1 and 2, the culture with recycled Fibra-Cel® disks had the same behavior as the culture with non-recycled Fibra-Cel® disks until the end of the run. Productivity and metabolism were similar. Specifically, the r-hTBP-1 productivity level obtained with recycled Fibra-Cel® disks is comparable to the r-hTBP-1 productivity level obtained with non-recycled Fibra-Cel® disks.



**REFERENCES**

1. Bohak Z, Kadouri A *et al.* (1987) "Novel anchorage matrices for suspension culture of mammalian cells" *Biopolymers*. 26 Suppl:S205-213.
- 5 2. Buck CD and Loh PC (1985) "Growth of brown bullhead (BB) and other fish cell lines on microcarriers and the production of channel catfish virus (CCV)" *J Virol Methods*. 10(2):171-184.
3. European Pharmacopeia, 4th Edition, 2002. On-line edition.
4. Ikonomou L, Drugmand JC *et al.* (2002) "Microcarrier culture of lepidopteran cell lines: implications for growth and recombinant protein production" *Biotechnol Prog*. 18(6):1345-1355
- 10 5. Petti SA, Lages AC *et al.* (1994) "Three-dimensional mammalian cell growth on nonwoven polyester fabric disks" *Biotechnol Prog*. 10(5):548-550.
6. Pharmacopeia of the United States of America, Twenty-Sixth Revision. On-line edition.
- 15 7. Sabu A, Kumar SR *et al.* (2002) "Continuous production of extracellular L-glutaminase by Ca-alginate-immobilized marine *Beauveria bassiana* BTMF S-10 in packed-bed reactor" *Appl Biochem Biotechnol*. 102-103(1-6):71-9.
8. Wang G, Zhang W *et al.* (1992) "Modified CelliGen-packed bed bioreactors for hybridoma cell cultures. *Cytotechnology*" 9(1-3):41-49.

**CLAIMS**

1. A method of recycling a solid support for cultivation of anchorage-dependent cells located within a system for cell cultivation comprising the steps of:
  - 5       a) emptying said system of liquid;
  - b) rinsing said system with an aqueous solution ;
  - c) rinsing said system with a sodium hydroxide solution; and
  - d) rinsing said system with an aqueous solution.
2. The method of claim 1, wherein said aqueous solution is water.
- 10   3. The method of claim 1 or 2, wherein said sodium hydroxide solution is at a concentration selected from the group consisting of:
  - a) within a range of about 1% to about 3% sodium hydroxide;
  - b) within a range of about 1.5 % to about 2.5 % sodium hydroxide; and
  - c) about 2% sodium hydroxide.
- 15   4. The method of any of claim 1 to 3, wherein step (d) is performed at least twice.
5. The method of claim 4, wherein step (d) is performed three times.
6. The method of any of claims 1 to 5, wherein said solid support is made of non -woven fibrous matrix bonded to a porous support sheet.
7. The method of claim 6, wherein said solid support is a disk made of non-woven polyester bonded to a sheet of polypropylene mesh.
- 20   8. The method of any of claims 1 to 7, wherein said solid support is a microcarrier.
9. The method of any of claims 1 to 8, wherein said system comprises a bioreactor.
10. The method of claim 9, wherein said system further comprises an external column connected to said bioreactor.
- 25   11. The method of claim 9, wherein said bioreactor comprises an internal column.
12. The method of any of claims 10 or 11, wherein said solid support is located within said column.
13. The method of any of claims 1 to 12, wherein said system is sterilized after performing step (d).
- 30   14. The method of claim 10 or 12, wherein said external column is sterilized after performing step (d).

15. The method of any of claims 1 to 14, wherein step (d) is carried out with a circulation loop flow selected from the group consisting of:
- a) within a range of about  $500 \text{ l.h}^{-1}.\text{kg}^{-1}$  to about  $700 \text{ l.h}^{-1}.\text{kg}^{-1}$ ;
  - b) within a range of about  $550 \text{ l.h}^{-1}.\text{kg}^{-1}$  to about  $650 \text{ l.h}^{-1}.\text{kg}^{-1}$ ; and
  - c) about  $583 \text{ l.h}^{-1}.\text{kg}^{-1}$ .
16. The method of any of claims 1 to 15, wherein step (d) is carried out at ambient temperature.
17. The method of any of claims 1 to 16, wherein step (d) is carried out under an overpressure selected from the group consisting of:
- a) within a range of about 100 millibars to about 300 millibars;
  - b) within a range of about 150 millibars to about 250 millibars; and
  - c) about 200 millibars.
18. The method of any of claims 1 to 17, wherein step (d) is carried out for a duration selected from group of:
- a) within a range of about 5 minutes to about 30 minutes;
  - b) within a range of about 5 minutes to about 20 minutes; and
  - c) about 10 minutes.
19. The method of any of claims 1 to 18, wherein step (c) is carried out with a circulation loop flow set at an initial value selected from the group consisting of:
- a) within a range of about  $100 \text{ l.h}^{-1}.\text{kg}^{-1}$  to about  $300 \text{ l.h}^{-1}.\text{kg}^{-1}$ ;
  - b) within a range of about  $150 \text{ l.h}^{-1}.\text{kg}^{-1}$  to about  $250 \text{ l.h}^{-1}.\text{kg}^{-1}$ ; and
  - c) about  $215 \text{ l.h}^{-1}.\text{kg}^{-1}$ .
- and wherein said circulation loop flow is progressively increased to a final value selected from the group consisting of:
- a) within a range of about  $500 \text{ l.h}^{-1}.\text{kg}^{-1}$  to about  $700 \text{ l.h}^{-1}.\text{kg}^{-1}$ ;
  - b) within a range of about  $550 \text{ l.h}^{-1}.\text{kg}^{-1}$  to about  $650 \text{ l.h}^{-1}.\text{kg}^{-1}$ ; and
  - c) about  $583 \text{ l.h}^{-1}.\text{kg}^{-1}$ .
20. The method of claim 19, wherein the circulation loop flow is maintained at a final value of about  $583 \text{ l.h}^{-1}.\text{kg}^{-1}$  for a duration selected from group of:
- a) within a range of about 20 minutes to about 40 minutes;
  - b) within a range of about 25 minutes to about 35 minutes; and
  - c) about 30 minutes.


21. The method of any of claims 1 to 20, wherein step (c) is carried out at a temperature selected from the group consisting of:
- a) within a range of about 50°C to about 70 minutes;
  - b) within a range of about 55°C to about 65°C minutes; and
  - c) about 60°C.
22. The method of any of claims 1 to 21, wherein step (b) is carried out at a temperature selected from the group consisting of:
- a) within a range of about 50°C to about 70°C;
  - b) within a range of about 55°C to about 65°C; and
  - c) about 60°C.
23. The method of any of claims 1 to 22, wherein step (b) is carried out under an overpressure selected from the group consisting of:
- a) within a range of about 200 millibars to about 400 millibars;
  - b) within a range of about 250 millibars to about 350 millibars; and
  - c) about 300 millibars.
24. The method of any of claims 1 to 23, wherein step (b) is carried out for a duration selected from group of:
- a) within a range of about 5 minutes to about 30 minutes;
  - b) within a range of about 5 minutes to about 20 minutes; and
  - c) about 10 minutes.
25. A solid support for cultivation of anchorage-dependent cells recycled according to the method of any of claim 1 to 24.
26. The solid support of claim 25, wherein said solid support is a disk made of non-woven fibers bonded to a porous support sheet.
27. The method of claim 26, wherein said solid support is a disk made of non-woven polyester bonded to a sheet of polypropylene.
28. The solid support of claim 25, wherein said solid support is a microcarrier.
29. Use of the solid support of any of claim 25 to 28 for cultivation of cells.
30. The use of claim 29, wherein said solid support is made of non-woven fibers bonded to a porous support sheet.
31. The use of claim 30, wherein said solid support is a disk made of non-woven polyester bonded to a sheet of polypropylene.

- 32. The use of claim 31, wherein said solid support is a microcarrier.
- 33. The use of any of claims 29 to 32, wherein said cell is anchorage-dependent.


**ABSTRACT**

5 This invention relates to methods for use in industrial production of proteins. Specifically, the present invention provides a method of recycling solid supports for cultivation of anchorage-dependent cells such as, e.g., microcarriers and Fibra-Cel® disks. Solid supports recycled by a method of the present invention allow obtaining a protein productivity level comparable to the productivity level obtained with non-recycled solid supports.

# Cumulative Productivity/ Kg Fibra-Cel<sup>®</sup>

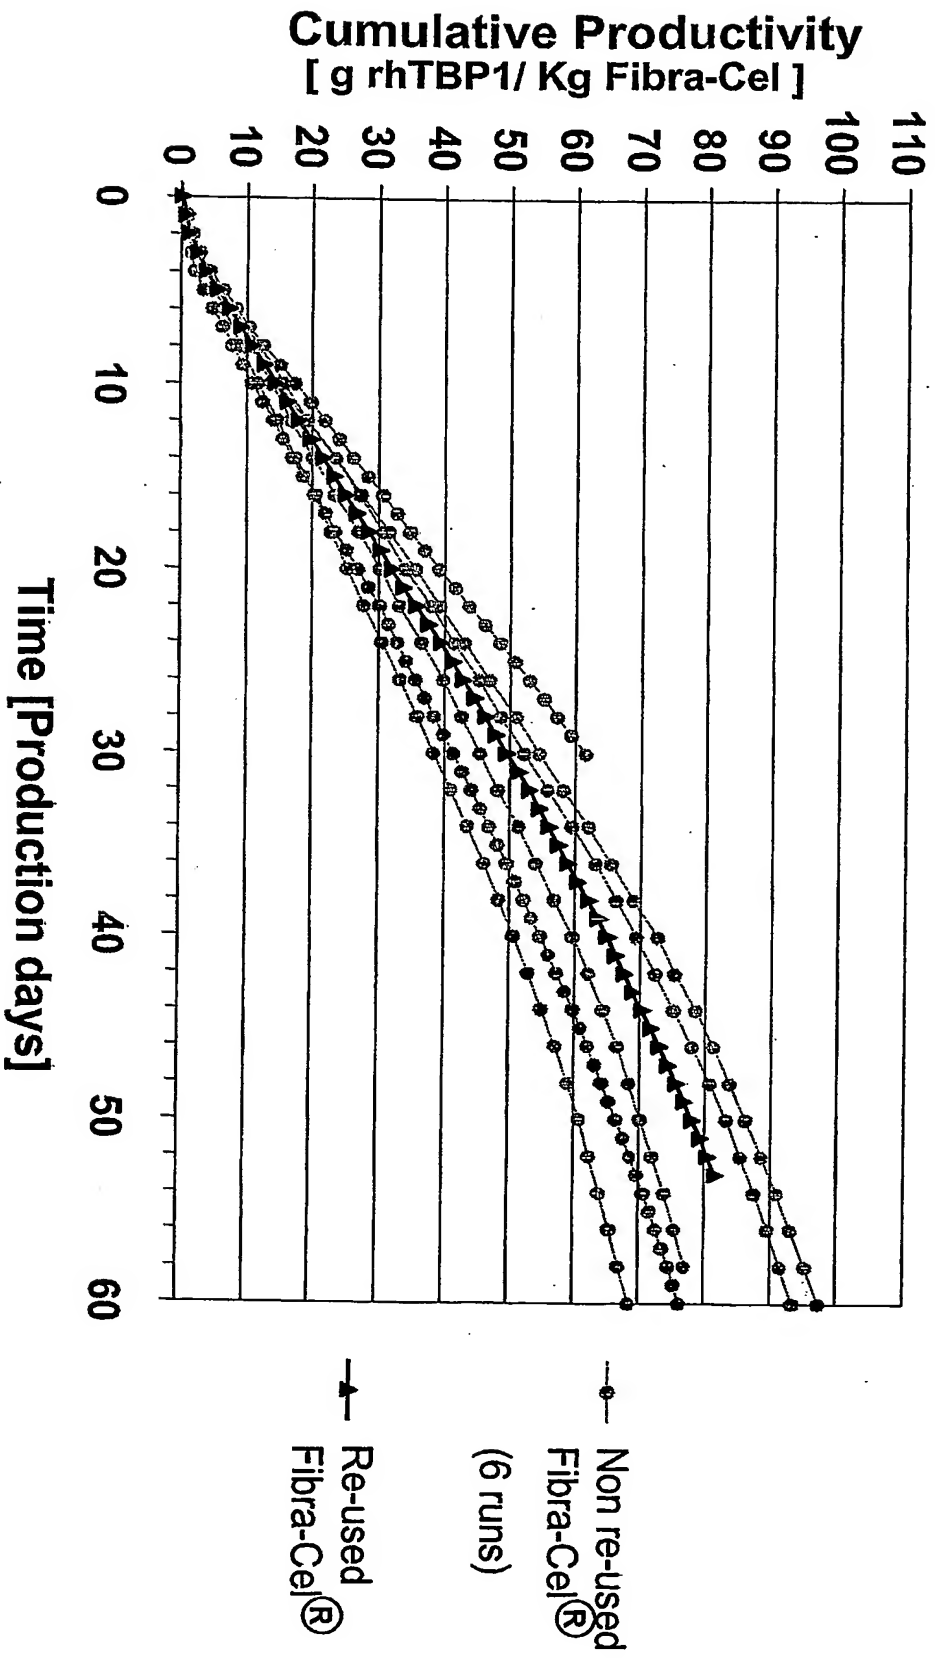

## Glucose Consumption Rate

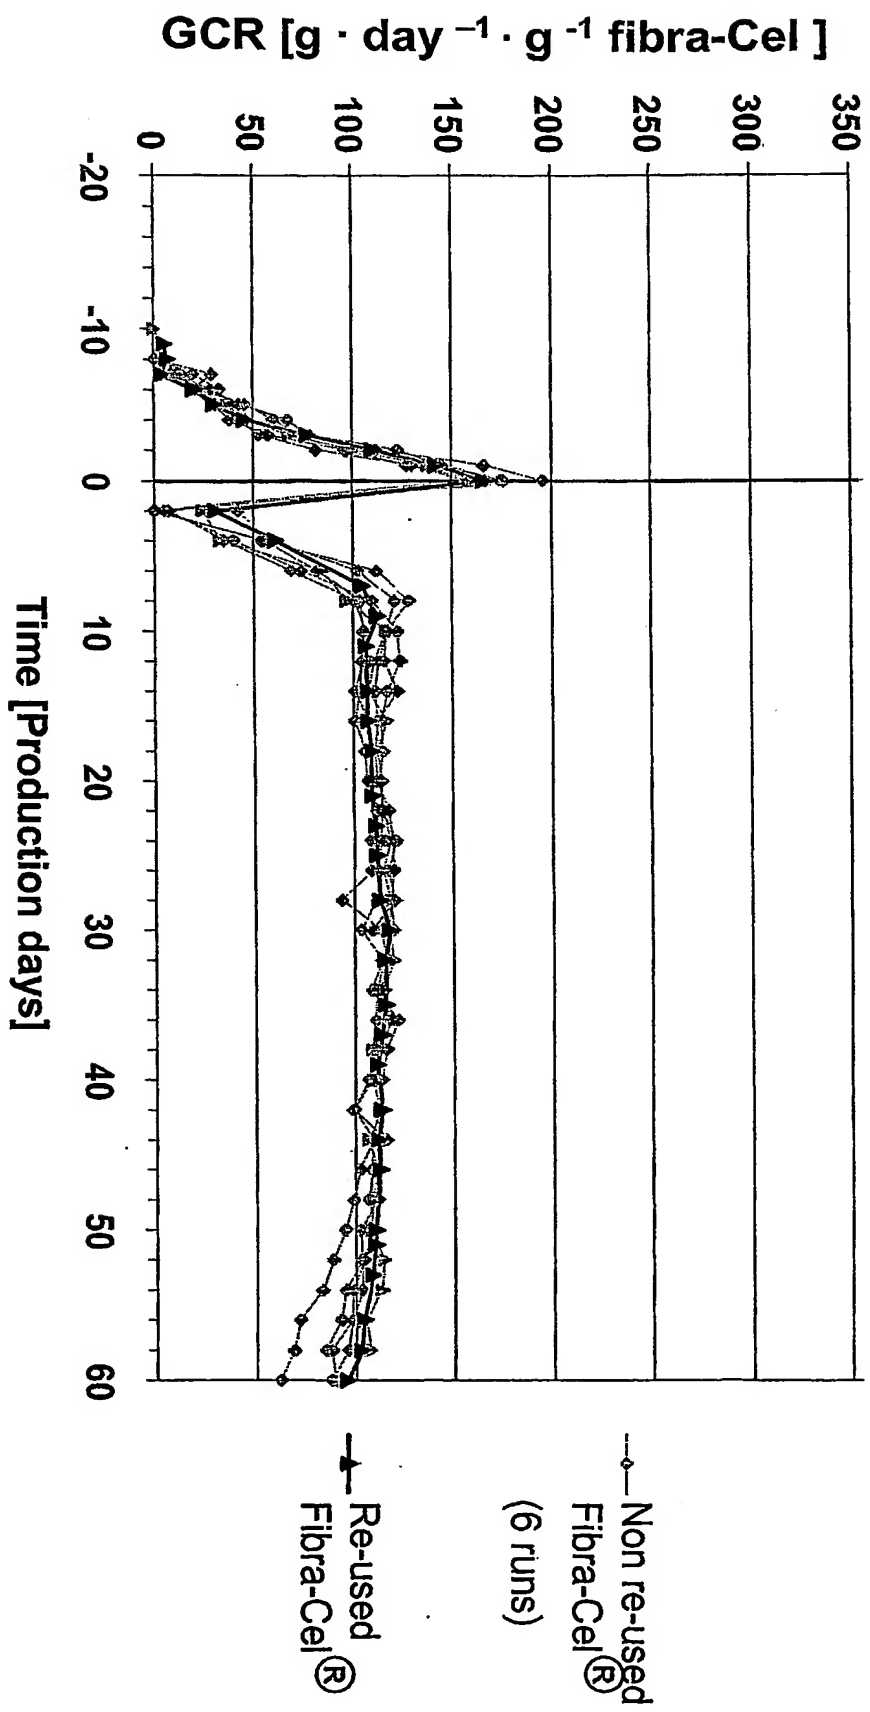



**PCT/EP2004/053133**



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record.**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**